



**PRODUCT
CATALOGUE**



YOUR PARTNER

MASKING TAPE SPECIALIST

Aiya TAPE is a professional masking tape manufacturer with over 30 years of industry experience. We proudly serve a wide range of industries, including Aerospace, Electronics, Automotive, Advertising, Apparel, and other specialized manufacturing sectors worldwide. Our extensive expertise and commitment to quality have earned us a trusted reputation among customers around the globe.

⌆
30+

Years
Industry Experience

⌆
50+

Countries
and Regions

⌆
10K+ m² 300m m²

Manufacturing Plants

Annual
Output





YOUR SOLUTION

Discover the complete line of Aiya masking products, engineered to provide high-performing adhesion to a variety of surfaces, excellent resistance to high temperatures and clean removal after use.



Table of Content

Company Profile	02
State-of-the-art Facilities	06
Research and Development	08
Sustainability and Responsibility	10
Custom-made Tape Solution	12
Jumbo Roll Products	14
Automotive Masking Tape	16
Building and Construction Masking Tape	26
Packaging Tape	32
Application Tape	34
Pallet Tape	36
Technical Data	38



Coating Machine

Impregnation Machine



State-of-the-art Facilities

At our manufacturing plant, we're dedicated to producing high-quality products efficiently and consistently. We achieve this through the implementation of advanced quality control systems that ensure every product we produce meets or exceeds our stringent standards.

Our commitment to lean manufacturing principles means that we're constantly optimizing our processes to reduce waste and increase efficiency.

In addition, we've invested in digitally connected production lines that allow us with valuable data that we can use to further improve our processes.

By combining advanced quality control systems, lean manufacturing principles, and digitally connected production lines, we're able to deliver products that meet the highest standards of quality and consistency while remaining cost-effective.

Research and Development

Quality and Vertical Integration

Aliya TAPE's research center, equipped with advanced instruments, develops innovative tapes. It analyzes polymers, resins, additives, and rubbers, and co-engineers with market leaders.

The center designs adhesive tapes, characterizing their performance using advanced machines. Performance is tested on car bodies and paint plants.

Aliya TAPE received the **EcoVadis Bronze Medal** for Sustainability, a recognition that places its performance in the **top 35%** of the industry. This accolade underscores the company's commitment to sustainable practices and high-quality standards.

Furthermore, the company has implemented quality, environmental and energy management systems according to international standards such as **ISO 9001, ISO 14001, ISO 45001, and ISO 50001**. These standards ensure that the company adheres to the highest quality and environmental standards.

Aliya TAPE is also committed to responsible sourcing of materials. The company has obtained **FSC® chain of custody certification**, which promotes responsible forest management. This certification ensures that Aliya TAPE sources materials from responsibly managed forests, and FSC® certified products are available upon request.



FSC Chain of Custody Certification




Quality Management System Certification



Environmental Management System Certification



Occupational Health and Safety Management System Certification



Energy Management System Certification



Sustainability and Responsibility


Toluene Recycling System

As a masking tape manufacturer, we prioritize environmental protection and sustainability. Our protocols ensure safe and responsible waste treatment and disposal, and our experts monitor compliance with regulations and standards.

Our large-scale toluene recycling system reduces waste and emissions, while minimizing dependence on raw materials. We believe

environmental responsibility is a smart business strategy that builds trust with customers and stakeholders.

We are proud to be a part of the global movement towards a more sustainable future and will continue to innovate and improve our environmental practices in the years to come.

GHEZZI & ANNONI  FA 305

Custom-made tape solution

Your private label finished roll products

AIYA TAPE is your strategic partner for custom-made tape solutions. With state-of-the-art facilities in Europe and Asia, we offer unique application and product know-how to streamline your business and complement your portfolio.


Whether you need off-the-shelf or tailor-made solutions, our experts will work with you to develop tape products that

perfectly match your market, application, and positioning.

As a leading producer of masking tape in Asia, we provide unmatched expertise in private label tape manufacturing. Choose your tape, and we'll develop it according to your needs, with customizable options for color, width, and length.



Tape core design

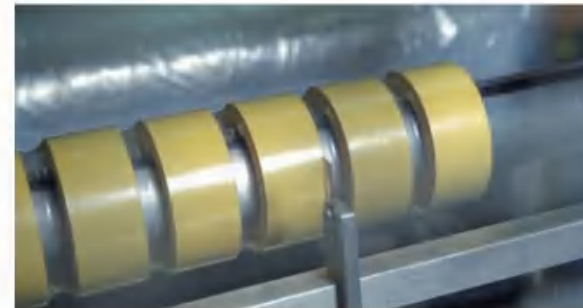

Shrink sleeve wrap

Finished Roll Packing

SIZE (WIDTH x LENGTH)	QUANTITY (PER BOX)
18mm x 30-55m	48 Rolls / Box
19mm x 30-55m	
24mm x 30-55m	36 Rolls / Box
25mm x 30-55m	
36mm x 30-55m	24 Rolls / Box
38mm x 30-55m	
48mm x 30-55m	20 Rolls / Box
50mm x 30-55m	



Jumbo Roll Products



FEATURES:

- Wide range of sizes and colors available
- Made from high-quality paper and adhesive
- Backward integration for improved quality and pricing control
- High-speed jumbo rewinding and converting for efficient production
- Waterproof and anti-pressure packing for protection during shipping and storage

SIZE:

- 1250mm×1500m
- 1250mm×1800m



Automotive Masking Tape

Alia offers a series of masking tape models with temperature resistance ranging from 80°C to 170°C, each tailored with specific features and performance levels to meet the demands of various applications. Our tapes deliver sharp, clean paint lines, outstanding conform ability, and strong holding power—leaving no adhesive residue upon removal. They are suitable for both solvent- and water-based coatings and perform reliably under high-temperature curing conditions.

80°C Economic Grade

MT 722

90°C -100°C Medium Grade

MT63 Series MT800W MT636 Series

110°C -120°C Professional Grade

MT630 Plus MT639 MT528 MT528H MT635 Series

130°C Performance Grade

MT529G MT613Y

150°C -170°C High Performance Grade

MT816 MT817H MT818



Automotive Aftermarket Solutions

MT 722

Economic Grade Masking Tape



PRODUCT DESCRIPTION

MT 722 is an entry level masking tape for automotive refinishing, with rubber-based adhesive for secure adhesion to metals and plastics, clean removal, and no residue or paint flaking on painted or bare surfaces.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	135 µm ± 10µm	5.3 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7.5 N/25mm	≥27 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (30 minutes)	80°C	176°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color
Off-white

FEATURES

- Adapts well to irregular surfaces
- Good holding power when overlapped with tape, masking paper, or film
- Provides clean edges
- Easy and residue-free removal from the application surface



80°C/176°F



Adhesion
● ● □ □ □

MAIN APPLICATIONS



Automotive Painting

MT 63 Series

Colorful Masking Tape



PRODUCT DESCRIPTION

MT63 series is a versatile and high-quality masking tape that comes in multiple colors, making it the perfect choice for various market needs. MT 63 series is temperature-resistant up to 90°C/194°F for 30 minutes, making it suitable for use in a wide range of applications.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	140 µm ± 10µm	5.5 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥7 %	≥7 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (45 minutes)	90°C	194°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color					
Light brown	Pink	Red	Blue	Orange	Black
Light blue	Light green	Dark blue	Purple	Yellow	
Dark brown	Medium green	Dark green	Light gold		

FEATURES

- Sharp color separation on curves or straight lines
- Excellent adhesion to backing when layered
- Smooth to touch – easy to work with
- Heat-resistant up to 90°C/194°F without residue



90°C/194°F



Adhesion
● ● □ □ □

MAIN APPLICATIONS



Automotive Painting

MT 800W

100°C Medium Grade Masking Tape



PRODUCT DESCRIPTION

MT800W masking tape is backed by crepe paper and is suitable for automotive painting. It features high adhesion and adaptability, and can be adhered to various surfaces. It has good cohesion and adhesion.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	140 µm ± 10µm	5.5 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (45 minutes)	100°C	212°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color	
Off-white	Yellow

FEATURES

- Suitable for curved or irregular surfaces
- Excellent oil resistance
- Superior weather resistance, all-season performance
- Heat-resistant up to 100°C without residue



100°C/212°F



Adhesion
● ● □ □ □

MAIN APPLICATIONS



Automotive Painting

MT 636 Series

Anti-UV & Waterproof Masking Tape



PRODUCT DESCRIPTION

MT636 series is a top-quality masking tape that offers excellent waterproof ability, with 3-5 days of UV resistance and temperature resistance of up to 100°C/212°F for 45 minutes. This tape is specially designed to meet the needs of customers who require waterproof for automotive and outdoor construction applications. Its good moisture-resistance properties and good adhesion ensure that it sticks firmly to various surfaces, including metal, plastic, and painted surfaces.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	135 µm ± 10µm	5.4 mils
Tensile strength*	≥70 N/25mm	≥15.7 Lbs/in
Elongation at break*	≥5 %	≥5 %
Adhesion to steel plate*	≥8 N/25mm	≥28.8 oz/in
Initial Tack No.ball	≥20	≥20
Service temperature up to (45 minutes)	100°C	212°F

Backing material	Adhesive type	*Typical value
Plain Paper	Natural rubber	

Available color			
Light blue	Orange	Lemon Yellow	White

FEATURES

- Waterproof properties for protection
- UV resistance for 3-5 days • Ideal for use with water-based paints
- Plain paper backing for added strength and durability
- Heat-resistant up to 100°C/212°F without residue (max 45 min)



Waterproof



UV Resistance



100°C/212°F



Adhesion
● ● □ □ □

MAIN APPLICATIONS



Automotive Painting



Outdoor Application



MT 630 Plus

UV Resistant
Masking Tape



PRODUCT DESCRIPTION

MT630 plus is a high-quality tape that can withstand higher temperatures up to 110°C/230°F for 45 minutes. Its thicker and softer paper provides a moderate waterproof function and enhances the tape's overall durability. In addition, this tape has excellent UV resistance 5 days, making it ideal for outdoor painting applications.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	155 µm ± 10µm	6.1 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No ball	≥18	≥18
Service temperature up to (45 minutes)	110°C	230°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color	Color
	● Lemon Yellow

FEATURES

- UV resistant for 5 days
- Sharp point break-lines
- Ideal for glass, metal and rubber
- Comfortable with controlled unwind
- Heat-resistant up to 110°C/230°F without residue



MAIN APPLICATIONS



Automotive
Painting

MT 639

Anti-UV & Waterproof
Masking Tape



PRODUCT DESCRIPTION

MT 639 masking tape is anti-UV for 14 days, waterproof and high-performing, perfect for auto repairs. With high adhesion and compatibility with water-based paints, it endures drying up to 110°C/230°F (45 min) and tape overlap with masking paper.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	150 µm ± 10µm	5.9 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥5.5 N/25mm	≥19.8 oz/in
Initial Tack No ball	≥14	≥14
Service temperature up to (45 minutes)	110°C	230°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color	Color
	● Dark blue

FEATURES

- UV resistance for 14 days
- Waterproof properties for protection
- Ideal for use with water-based paints
- Crepe paper backing for added strength and durability
- High-temperature resistance up to 110°C/230°F (max. 45min)



MAIN APPLICATIONS



Automotive
Painting



Outdoor
Application

MT 528

Professional Grade Masking Tape



PRODUCT DESCRIPTION

MT 528 is specifically designed for automotive painting, repair and electronics. The tape has excellent adhesion. With its ability to withstand heat up to 110°C/230°F, it is particularly well-suited for use in the mid-to-high-end automotive repair market. The tape has excellent adhesion and is suitable for a wide range of high-temperature applications in the automotive industry, as well as electronic applications.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	160 µm ± 10µm	6.3 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥7 %	≥7 %
Adhesion to steel plate*	≥6.5 N/25mm	≥23.4 oz/in
Initial Tack No.ball	≥18	≥18
Service temperature up to (45 minutes)	110°C	230°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color
 Beige #2  Medium green  Dark Blue

FEATURES

- Controlled adhesion
- Creates clean and razor-sharp lines
- Suitable for most common water and solvent base paints
- High-temperature resistance up to 110°C/230°F (max 45 min)



110°C/230°F



Adhesion



MAIN APPLICATIONS



Automotive Painting

MT 528H

Professional Grade High-performance Masking Tape



PRODUCT DESCRIPTION

MT 528H professional high-performance waterproof masking tape for automotive with high temperature drying cycles up to 120°C. Offers high adhesion with solvent-based adhesive and crepe paper backing. Adapts to irregular surfaces and leaves no residue.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	145 µm ± 10µm	5.7 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7.5 N/25mm	≥27 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (45 minutes)	120°C	248°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color
 Beige #3

FEATURES

- Waterproof properties for protection
- Ideal for use with water-based paints
- Crepe paper backing for added strength and durability
- High-temperature resistance up to 120°C/248°F (max 45 min)



Waterproof



120°C/248°F



Adhesion



MAIN APPLICATIONS



Automotive Painting

MT 635 Series

Excellent Waterproof Masking Tape



PRODUCT DESCRIPTION

MT 635 series masking tape features a soft, thin backing paper with a vibrant color. Its enhanced flexibility allows it to conform easily to curves and irregular surfaces. The tape offers excellent waterproof performance and withstands temperatures up to 120°C. With UV resistance for up to 5 days, it is ideal for automotive painting, detailing, and repair work. MT 635 ensures strong adhesion and allows for clean, easy removal without residue.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	140 µm ± 10µm	5.5 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7.5 N/25mm	≥27 oz/in
Initial Tack No.ball	≥18	≥18
Service temperature up to (45 minutes)	120°C	248°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color
 Orange  Red  Pink  Green

FEATURES

- Excellent Waterproofing
- Controlled adhesion
- UV resistant for 5 days
- Perfect for automotive and various applications
- Heat-resistant up to 120°C/248°F without residue



120°C/248°F



Adhesion



UV Resistance

MAIN APPLICATIONS



Automotive Painting



Various Applications

MT 529G

High-temperature Resistant Masking Tape



PRODUCT DESCRIPTION

MT 529G is a high-performance masking tape designed to withstand temperatures up to 130°C (266°F) for 45 minutes. It offers excellent solvent resistance, making it ideal for critical automotive painting applications. Engineered for demanding conditions, MT 529G ensures reliable performance and clean results in professional refinishing work.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	160 µm ± 10µm	6.3 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥7 %	≥7 %
Adhesion to steel plate*	≥8.5 N/25mm	≥30.6 oz/in
Initial Tack No.ball	≥12	≥12
Service temperature up to (45 minutes)	130°C	266°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color
 Green

FEATURES

- High adhesion
- Good paint anchorage
- Creates clean and razor-sharp lines
- Excellent adhesion on painted metal, rubber and glass
- Heat-resistant up to 130°C/266°F without residue (max 45 min)



130°C/266°F



Adhesion



MAIN APPLICATIONS



Automotive Painting

MT 613Y

UV Resistant
Automotive Washi Tape



PRODUCT DESCRIPTION

Washi Tape MT613Y is ideal for automotive refinishing at 130°C. Achieve clean, sharp lines on small and curved parts. Adheres to various surfaces with strong, residue-free hold with UV resistance for 15 days. Perfect for intricate, narrow grooves. Elevate precision in your projects.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	95 µm± 10µm	3.7 mils
Tensile strength*	≥80 N/25mm	≥18.0 Lbs/in
Elongation at break*	≥3.5 %	≥3.5 %
Adhesion to steel plate*	≥2.8 N/25mm	≥10.1 oz/in
Initial Tack No.ball	≥12	≥12
Service temperature up to (30 minutes)	130°C	266°F

Backing material	Adhesive type	*Typical value
Washi Paper	Water Base Acrylic	

Available color  Yellow

FEATURES

- Controlled adhesion - Ideal for glass, metal and rubber
- UV resistance for 15 days
- Resistant to moisture, water base and solvent base paint
- Heat-resistant up to 130°C/266°F without residue (30 min)



MAIN APPLICATIONS



MT 816

Performance Grade
High-temp Resistant Masking Tape



PRODUCT DESCRIPTION

MT816 has certain waterproof performance, can withstand high temperatures up to 150°C with stable performance, and has excellent adhesion. It is suitable for automotive painting.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	170 µm± 10µm	6.7 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥9 N/25mm	≥32.4 oz/in
Initial Tack No.ball	≥10	≥10
Service temperature up to (45 minutes)	150°C	302°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color  Natural white

FEATURES

- High adhesion, suitable for irregular surfaces
- It is easy to tear and requires no tools to operate
- Durable and stable solution for a range of industrial applications



MAIN APPLICATIONS



MT 817H

Performance Grade
High-temp Resistant Masking Tape



PRODUCT DESCRIPTION

MT817H is suitable for a variety of industries, including automotive, polishing and electronics. It has excellent adhesion, can firmly adhere to the surface, and is easy to tear off, provides clean removal without leaving any residue. The maximum temperature is 170°C/338°F, for up to 45 minutes, and it can maintain durability and stability at high temperatures.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	175 µm± 10µm	6.9 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥9 N/25mm	≥32.4 oz/in
Initial Tack No.ball	≥10	≥10
Service temperature up to (45 minutes)	170°C	338°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color  Natural white

FEATURES

- High-temperature performance
- Conformability and flexibility
- Durable and user-friendly solution for a range of industrial applications
- High-temperature resistance up to 170°C/338°F(max 45 min)



MAIN APPLICATIONS



MT 818

Performance Grade
High-temp Resistant Masking Tape



PRODUCT DESCRIPTION

MT818 is a high temp masking for car painting and other industry use. Withstands moderate temperatures up to 170°C/338°F. It offers clean removal, sharp paint lines, and consistent unwind. Adheres to metal, rubber, plastics and leaves no residue.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	190 µm± 10µm	7.5 mils
Tensile strength*	≥95 N/25mm	≥21.7 Lbs/in
Elongation at break*	≥5 %	≥5 %
Adhesion to steel plate*	≥9 N/25mm	≥32.4 oz/in
Initial Tack No.ball	≥10	≥10
Service temperature up to (45 minutes)	170°C	338°F

Backing material	Adhesive type	*Typical value
Plain Paper	Natural rubber	

Available color  Natural white

FEATURES

- High-temperature performance
- Suitable for various surfaces
- High-temperature resistance up to 170°C/338°F(max 45 min)



MAIN APPLICATIONS



Building & Construction



General Purpose Masking Tape

Our general purpose masking tape category features two versatile solutions—crepe paper tape and washi tape—tailored for daily painting, masking, and decorative tasks. Designed to deliver reliable results with minimal effort, these tapes are ideal for both DIY enthusiasts and professional users, offering excellent performance on a wide variety of surfaces.

General Purpose Series

MT 900 MT 923A MT 923B MT62 Series

Washi Series

MT61 Series

MT 900

General Purpose Masking Tape



PRODUCT DESCRIPTION

MT900 is widely used for home decoration painting and DIY applications. It offers excellent oil resistance and maintains stable performance even after extensive paint spraying, with no falling off or residual adhesive. For indoor decoration, it meets various needs such as color separation, masking protection, construction marking, non-critical bundling, and light-duty fastening.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	145 µm± 10µm	5.7 mils
Tensile strength*	≥65 N/25mm	≥14.6 Lbs/in
Elongation at break*	≥7 %	≥7 %
Adhesion to steel plate*	≥6.5 N/25mm	≥23.4 oz/in
Initial Tack No.ball	≥10	≥10
Service temperature up to (30 minutes)	75°C	167°F

Backing material	Adhesive type	*Typical value
Crepe Paper	Natural rubber	

Available color  White

FEATURES

- Home decoration and DIY applications
- Excellent performance and reliability
- The ideal choice for indoor masking and painting operations
- Perfect for non-critical bundling, fastening, splicing, and labeling



Adhesion 

MAIN APPLICATIONS



Painting



Multiple purpose

MT 923A

General Purpose Masking Tape



PRODUCT DESCRIPTION

General purpose MT923A masking tape designed for indoor paint applications. Saturated crepe paper coated with natural rubber adhesive work well on smooth and irregular surface, great adhesion and strong holding force, with no residue left on the surface. Ideal choice for furniture, wood and wall painting.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	160 µm± 10µm	6.3 mils
Tensile strength*	≥70 N/25mm	≥15.7 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (30 minutes)	80°C	176°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color  White

FEATURES

- Compatible with many types of paint
- Quick and easy removal
- Leaves no adhesive residue on the application surface
- Suitable for masking and painting operations in building and renovation.



Adhesion 

MAIN APPLICATIONS



Painting



Multiple purpose

MT 923B

General Purpose Masking Tape




PRODUCT DESCRIPTION

MT 923B features a crepe paper backing and solvent-borne rubber resin adhesive for quick and easy residue-free removal. Compatible with many paint types, it's ideal for indoor wall and furniture protection, as well as building and renovation, and non-critical bundling, holding.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	150 µm± 10µm	5.9 mils
Tensile strength*	≥75 N/25mm	≥16.9 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No.ball	≥12	≥12
Service temperature up to (30 minutes)	80°C	176°F

Backing material	Adhesive type	*Typical value
Crepe Paper	Natural rubber	

Available color  White

FEATURES

- Quick and easy removal
- Leaves no adhesive residue on the application surface
- Suitable for masking and painting operations in building and renovation.



Adhesion 

MAIN APPLICATIONS



Painting



Multiple purpose

MT 62 Series

Colorful Painter's Masking Tape



PRODUCT DESCRIPTION

Colorful MT 62 series is designed for demanding painting and building jobs, sticking well to multiple surfaces and removing cleanly. Its versatility and quality-price ratio make it ideal for DIY projects, with good holding power when overlapped with film.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	140 µm± 10µm	5.5 mils
Tensile strength*	≥70 N/25mm	≥15.7 Lbs/in
Elongation at break*	≥8 %	≥8 %
Adhesion to steel plate*	≥7 N/25mm	≥25.2 oz/in
Initial Tack No.ball	≥16	≥16
Service temperature up to (30 minutes)	75°C	167°F

Backing material	Adhesive type	*Typical value
Saturated Crepe Paper	Natural rubber	

Available color  Pink  Red  Orange  Black
 Light blue  Dark blue  Purple  Brown
 Light yellow  Green  Medium green  Dark green  Dark brown

FEATURES

- High visibility for easy removal
- Excellent holding power, and quickstick
- Good contact on multiple surfaces
- Good paint anchorage



Adhesion 

MAIN APPLICATIONS



Painting



Multiple purpose




MT 61 Series

Construction & Home Decoration
Washi Tape

PRODUCT DESCRIPTION

The MT61 series washi tape is specially designed for diverse applications including interior home decoration, outdoor construction, floor protection, and DIY projects. The MT61 series offers different thickness options, featuring soft texture and easy peel-off and UV resistance for 12 days.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	100-130 µm / 10µm	3.9 - 5.1 mils
Tensile strength*	≥80-95 N/25mm	≥17.9-21.6 Lbs/in
Elongation at break*	≥3.5 %	≥3.5 %
Adhesion to steel plate*	≥3 N/25mm	≥10.8 oz/in
Initial Tack No.ball	≥12	≥12
Service temperature up to (30 minutes)	100°C	212°F
Backing material	Adhesive type	*Typical value
Washi Paper	Water Base Acrylic	
Available color	  	
	Dark Blue Light Yellow Light Green	

FEATURES

- UV resistance for 12 days
- Soft paper can fit well on curved surfaces
- Heat-resistant up to 100°C with stable performance
- Waterproof properties for protection
- Available in multiple thickness options



MAIN APPLICATIONS



MT 590E

High-Performance Packaging Tape

PRODUCT DESCRIPTION

MT590E packaging tape is an ideal choice for eco-friendly packaging. It offers high tensile strength and excellent elongation, making it suitable for heavy-duty applications. With strong adhesion and moderate waterproof performance, it effectively prevents seal failure caused by environmental humidity—ensuring reliable protection throughout logistics, transportation and storage.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	150 µm± 10µm	5.9 mils
Tensile strength*	≥85 N/25mm	≥19.1 Lbs/in
Elongation at break*	≥5 %	≥5 %
Adhesion to steel plate*	≥10 N/25mm	≥36 oz/in
Initial Tack No ball	≥14	≥14
Service temperature up to (30 minutes)	85°C	185°F


Backing material	Adhesive type	<i>*Typical value</i>
Plain paper	Natural rubber	
Available color		
	Brown	

FEATURES

- Suitable for all seasons used
- Strong adhesion & superior sealing performance
- Outstanding tensile strength, ideal for heavy-duty packaging
- Waterproof, endures shipping conditions
- High temperature up to 85°C/185°F and has stable performance



MAIN APPLICATIONS

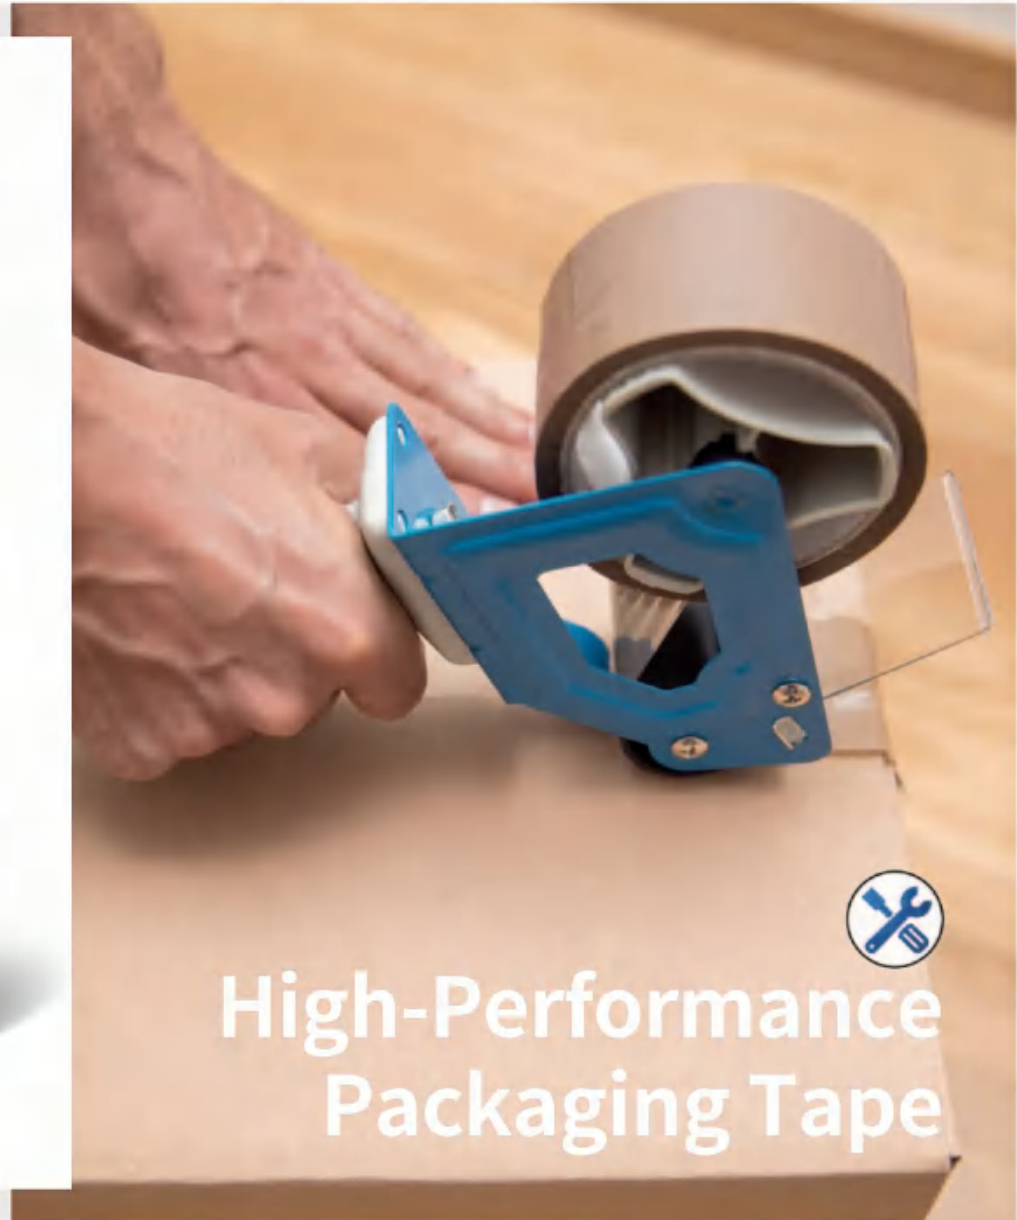

High-Performance Packaging Tape



MT 210M

Application Tape

PRODUCT DESCRIPTION

The MT210M application tape is ideal for transfer and positioning protection in applications such as advertising prints, wall and window graphics which conforms well to irregular surfaces. During the die-cutting of graphics and vinyl lettering, the MT210M positioning paper tape serves as an auxiliary material, ensuring cutting precision and efficiency.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	130 µm± 10µm	5.1 mils
Tensile strength*	≥70 N/25mm	≥15.7 Lbs/in
Elongation at break*	≥5 %	≥5 %
Adhesion to steel plate*	≥3.5±0.5 N/25mm	≥12.6±1.8 oz/in
Initial Tack No.ball	≥12	≥12
Service temperature up to (30 minutes)	80°C	176°F

Backing material	Adhesive type	*Typical value
Plain paper	Natural rubber	
Available color	<input type="radio"/>	Natural white

FEATURES

- Offers medium and high tack options for easy transfer and precise placement.
- Multi-purpose tape for various applications such as advertising decals, wall and window graphics, decal replacement, die-cut graphics, and cut vinyl lettering.
- Designed for hassle-free application.



Adhesion
●○○○○

MAIN APPLICATIONS





MT 210TM

Pallet Tape
for Screen Printing

PRODUCT DESCRIPTION

MT210TM pallet tape is designed for protecting pallets on automatic oval screen printing machines. It helps reduce cleaning time by keeping pallets clean during the printing process. Suitable for both aluminum and steel pallets, it unwinds smoothly and removes cleanly—leaving no residue on your printing surface.

TECHNICAL DATA

	Metric	Imperial Units
Total thickness*	130 µm ± 10µm	5.1 mils
Tensile strength*	≈70 N/25mm	≈15.7 Lbs/in
Elongation at break*	≈5 %	≈5 %
Adhesion to steel plate*	≈±1 N/25mm	≈14.4±3.6 oz/in
Initial Tack No ball	≈12	≈12
Service temperature up to (30 minutes)	80°C	176°F

Backing material	Adhesive type	*Typical value
Plain Paper	Natural rubber	

Available color Natural white

FEATURES

- Extends the life of pallets.
- Smooth unwinding for easy application.
- Saves time and effort in cleaning pallets.
- Specialized tape for screen printing pallet.
- Provides an excellent adhesive grip on aluminum or steel pallets.
- Clean removal process that leaves no residue on printing surface.



Adhesion
● ○ ○ ○ ○

MAIN APPLICATIONS



Screen
Printing



TECHNICAL DATA



PHYSICAL PROPERTIES

PRODUCT	BACKING	ADHESIVE	TOTAL THICKNESS (µm)	TENSILE STRENGTH (N/25mm)	ADHESION OF STEEL (N/25mm)	ELONGATION (% AT BREAK)	TEMPERATURE RESISTANCE	COLOR	FEATURES	APPLICATION
MT 722	Crepe paper	Natural rubber	135 (5.4mils)	≥75 (16.9Lbs/in)	≥7.5 (27oz/in)	≥8	80°C (176°F)			
MT 63 Series	Crepe paper	Natural rubber	140 (5.5mils)	≥75 (16.9Lbs/in)	≥7 (25.2oz/in)	≥7	90°C (194°F)			
MT 800W	Crepe paper	Natural rubber	140 (5.5mils)	≥75 (16.9Lbs/in)	≥7 (25.2oz/in)	≥8	100°C (212°F)			
MT 636 Series	Plain paper	Natural rubber	135 (5.4mils)	≥70 (15.7Lbs/in)	≥8 (28.8oz/in)	≥5	100°C (212°F)		 	
MT 630 Plus	Crepe paper	Natural rubber	155 (6.1mils)	≥85 (19.1Lbs/in)	≥7 (25.2oz/in)	≥8	110°C (230°F)		 	
MT 639	Crepe paper	Natural rubber	150 (5.9mils)	≥85 (19.1Lbs/in)	≥5.5 (19.8oz/in)	≥8	110°C (230°F)			
MT 528	Crepe paper	Natural rubber	160 (6.3mils)	≥85 (19.1Lbs/in)	≥6.5 (23.4oz/in)	≥7	110°C (230°F)		 	
MT 528H	Crepe paper	Natural rubber	145 (5.7mils)	≥85 (19.1Lbs/in)	≥7.5 (27oz/in)	≥8	120°C (248°F)		 	
MT 635 Series	Crepe paper	Natural rubber	140 (5.5mils)	≥75 (16.9Lbs/in)	≥7.5 (26.9oz/in)	≥8	120°C (248°F)			
MT 529G	Crepe paper	Natural rubber	160 (6.3mils)	≥75 (16.9Lbs/in)	≥8.5 (30.6oz/in)	≥7	130°C (266°F)			
MT 613Y	Washi paper	Water base acrylic	95 (3.7mils)	≥80 (18.0Lbs/in)	≥2.8 (10.1oz/in)	≥3.5	130°C (266°F)		 	
MT 816	Crepe paper	Natural rubber	170 (6.7mils)	≥85 (19.1Lbs/in)	≥9 (32.4oz/in)	≥8	150°C (302°F)			
MT 817H	Crepe paper	Natural rubber	175 (6.9mils)	≥85 (19.1Lbs/in)	≥9 (32.4oz/in)	≥8	170°C (338°F)			
MT 818	Plain paper	Natural rubber	190 (7.5mils)	≥95 (21.7Lbs/in)	≥9 (32.4oz/in)	≥5	170°C (338°F)			
MT 900 Series	Crepe paper	Natural rubber	145 (5.7mils)	≥65 (14.6Lbs/in)	≥6.5 (23.4oz/in)	≥7	75°C (167°F)			
MT 62 Series	Crepe paper	Natural rubber	140 (5.5mils)	≥70 (15.7Lbs/in)	≥7 (25.2oz/in)	≥8	75°C (167°F)			
MT 923A	Crepe paper	Natural rubber	160 (6.3mils)	≥70 (15.7Lbs/in)	≥7 (25.2oz/in)	≥8	80°C (176°F)			
MT 923B	Crepe paper	Natural rubber	150 (5.9mils)	≥75 (15.7Lbs/in)	≥7 (25.2oz/in)	≥8	80°C (176°F)			
MT 61 Series	Washi paper	Water base acrylic	100-130 (3.9-5.1mils)	≥80-95 (17.9-21.4Lbs/in)	≥3 (10.8oz/in)	≥3.5	100°C (212°F)		 	
MT 590E	Plain paper	Natural rubber	150 (5.9mils)	≥85 (19.1Lbs/in)	≥10 (36oz/in)	≥5	85°C (185°F)		 	
MT 210M	Plain paper	Natural rubber	130 (5.1mils)	≥70 (15.7Lbs/in)	≥3.5±0.5 (12.6±1.8oz/in)	≥5	80°C (176°F)			
MT 210TM	Plain paper	Natural rubber	130 (5.1mils)	≥70 (15.7Lbs/in)	≥4±1 (14.4±3.6oz/in)	≥5	80°C (176°F)			

PROFESSIONAL.

QUALITY.

RELIABLE.



CONTACT

Shimen Aya Tape Technology Co.,LTD.

PHONE :

+86-15058222082

E-MAIL :

jkcc@MYATAPE.COM

ADDRESS :

Room 401, Building 1, No. 39 Xinchang Road,
Haicang District, Xiamen, Fujian Province, CN



WeChat Subscriptions



WeChat Channels